

# TECHNICAL SPECIFICATION SHEET


## EXP-108 POWER PRE-STRETCH PALLET WRAPPER

### Identification

Product	EXP-108 Power Pre-Stretch Pallet Wrapper
---------	--

### Standard Specification

Max. Wrapping Height	2.4m
Max. Turntable Speed	12rpm
Max. Loading Weight	2000kg
Turntable Diameter	1500mm
Power Supply	100V, 110V, 220V, 230V, 240V, 50/60HZ, 1-Phase
Power Consumption	1.2kw
Turntable Motor	220V, AC, 3-Phase
Carriage Motor	220V, AC, 3-Phase
Power Pre-Stretch Motor	220V, AC, 3-Phase

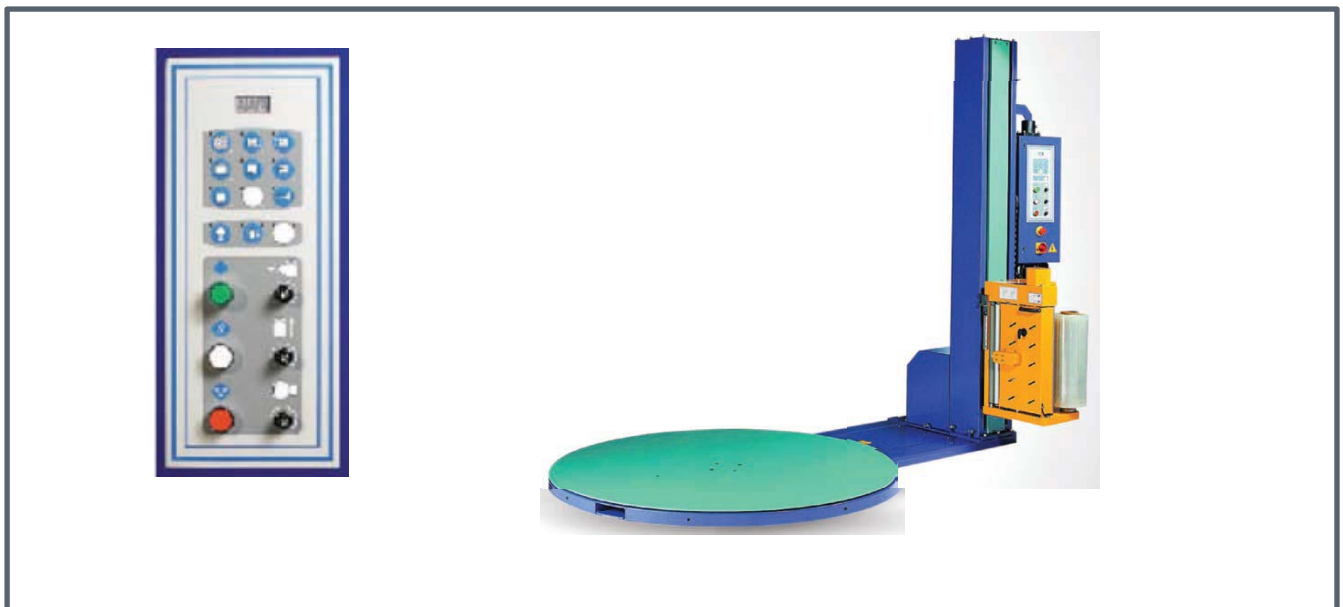

### Features Exclusive to Pro-Pac Packaging

2 tonne turntable capacity as standard

2.4m wrap height as standard

Schneider inverters and Telemecanique switches as standard

Sick photo centre for black and clear films

# TECHNICAL SPECIFICATION SHEET

## EXP-108 POWER PRE-STRETCH WRAPPER


### Major Features

300% power pre-stretch
Turntable home position
Soft start and stop
Choice of automatic/manual modes
Adjustable top and bottom wrap counts
Adjustable wrapping tension/ turntable speed/ carriage speed
180° rotating control box
Trouble shooting shown on screen
Manual reinforcing wrapping
Safety switch E stop
Advanced soft wrapping
Automatic film pin puncture
One way idle roller
Designed to allow film tail to stay outside of carriage
Features conditional 12 months parts and labour warranty

### Options

#### Turntable Diameter

<b>1.65m</b> (Max. Loading Weight: 1650kg)
<b>1.80m</b> (Max. Loading Weight: 2000kg)
<b>Wrapping Height:</b> 2.5m, 3.0m
<b>Ramps:</b> for 1.5m, 1.65m, 1.8m
<b>Turntable Type:</b> Horse Shoe
<b>1.65m</b> (Max. Loading Weight 1200kg)

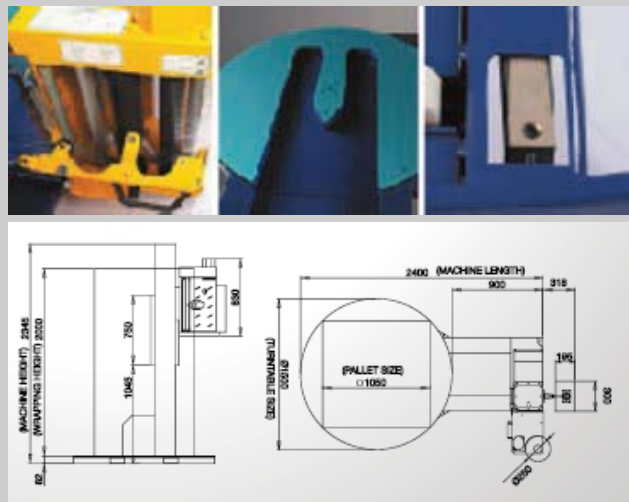

### Note:

All properties are approximate and are based on tests believed to be reliable and performed in conformance with recommended test methods. These values are presented for comparison purposes and do not represent a guarantee by the manufacturer. It is suggested that purchasers should test, prior to use, the suitability of this product for their particular application.